

# 13. Circular Saw Guides

Packaging Shrink package Box Vinyl package + header card Vinyl package Clear package  
 Sleeve package Bag Bag + header card Card No package

## Circular Saw Guide L-Angle KARUPITA NEW



9 mm stopper  
(73207)



73205

73206


73207

●Parts are listed from p.274

| Item Code | Description | Body Size (mm) | Weight (g) | JAN Code | Packing Unit | Packaging |
|-----------|-------------|----------------|------------|----------|--------------|-----------|
| 73205     | 45 cm/shaku | 632×303×70     | 690        |          | 2            |           |
| 73206     | 60 cm/shaku | 762×303×70     | 770        |          | 2            |           |
| 73207     | 1 m/shaku   | 1,162×303×64   | 940        |          | 1            |           |


### Features

●Simple design, lightweight, and easy to carry

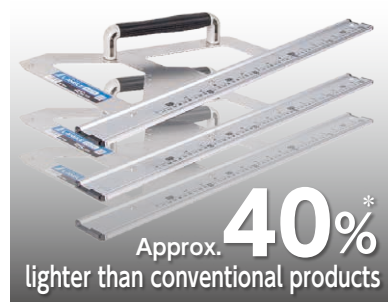

\*Comparison between L-Angle Plus 1 m and L-Angle KARUPITA 1 m

●With marking guide to easily check dimensions

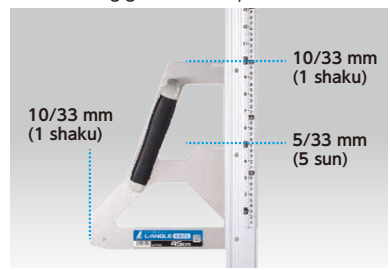

●With gradient graduations to easily check gradient by placing scale against material



- Features both shaku and metric graduations to come in handy for carpenters
- 9-mm-high stopper for cutting multiple sheets of plasterboard simultaneously (73207)
- With groove for slider (sold separately, item code 78236) – just slide it in the groove to prevent shifting during cutting
- Protective caps provided to protect material
- Stainless steel plate on guide edge

### Use

- As a guide rule when making square or angular cuts with an electric circular saw
- For dimension measurements
- For cutter guides

### Specifications

| Item Code                               | 73205                                                                                                                   | 73206                       | 73207                       |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------|-----------------------------|
| Perpendicularity                        | Less than 0.5 mm per 500 mm                                                                                             | Less than 0.6 mm per 600 mm | Less than 1 mm per 1,000 mm |
| Graduation                              | 1 shaku 6 sun 5 bu<br>50 cm                                                                                             | 2 shaku<br>60 cm            | 3 shaku 3 sun<br>1 m        |
| Blade Size                              | 632×58×7 mm                                                                                                             | 762×58×7 mm                 | 1,162×58×7 mm               |
| Sun Gradient Scale                      | 1 - 5 sun                                                                                                               |                             |                             |
| Vertical/ Horizontal Rule Marking Guide | Vertical: 5 sun, 1 shaku<br>Width: 1 shaku                                                                              |                             |                             |
| Edge Height                             | 15 mm                                                                                                                   |                             |                             |
| Material                                | Body: Aluminum<br>Guide Surface: Stainless steel<br>Protection End Cap: ABS resin<br>Handle: ABS resin, elastomer resin |                             |                             |