

Portable Simplified Heat Stress Meter Dust/Waterproof **NEW**

- Warning Level
- Bar Display
- Heat Stroke Index
- Temperature/Humidity Max/Min
- Alarm
- Vibration
- Silicone Cover
- Clock Function




73239

- Warning Level
- Icon Display
- Temperature/Humidity
- Alarm
- Clock Function




73238

- Warning level for heat stroke and influenza automatically switches according to environment and notifies the user with bar display, alarm, and vibration

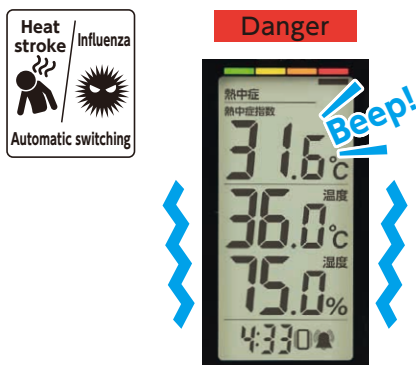

- Warning level for heat stroke and influenza automatically switches according to environment and notifies user with icons, words and alarm

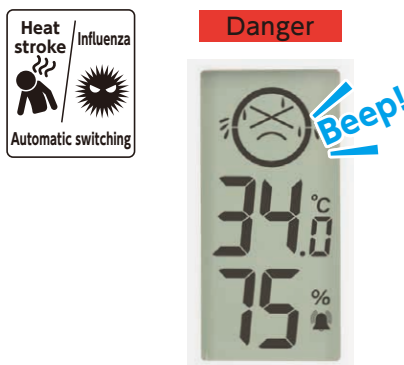

Heat Stroke Warning Level			
Caution	Warning	Severe Caution	Danger
24.5°C	26.5°C	29.5°C	31.5°C
Influenza Warning Level			
Mostly safe	Caution	Warning	
16.5 g/m³	10.5 g/m³	6.5 g/m³	

- Example of installation



Manufacturing premise



Building site



Construction site

Heat Stroke Warning Level			
Caution	Warning	Severe Caution	Danger
Heat stroke	Heat stroke	Heat stroke	Heat stroke
Smiley face	Neutral face	Frowny face	Crying face
Influenza Warning Level			
Mostly safe	Caution	Warning	
Influenza	Influenza	Influenza	
Smiley face	Neutral face	Frowny face	Crying face

- Example of installation



Stroller



Sport




Camp

Item Code	Description	Body Size (mm)	Weight (g)	JAN Code	Packing Unit	Package
73239	Plus Vibration Function	91×44×19	55	4 960910 732391	5	
73238	Basic	86×39×17	37	4 960910 732384	5	

Features

- Check temperature, humidity, and time
- Backlight function
- IP54 dust and water proof



- Band included for convenient installation



- Plus with Vibration Function

- Displays heat stroke index and dryness index
- Silicon cover included



- Basic

- Easy-to-read large LCD screen with 13 mm-character height



Use

- As a guide to prevent heat stroke and influenza
- Temperature and humidity control at construction sites, agricultural sites, classrooms, and offices, etc.

Specifications

Item Code	73239	73238
Accuracy	<Temperature> 0 - 50°C: ±1°C <Humidity> 30 - 90%: ±5% Other values ±10% <Clock> 1 second per day	
Measuring Range	Temperature: 0 - 50°C Humidity: 20 - 95% Heat Stroke Index: 21.1 - 51.0°C Dryness Index: 1.0 - 17.3g/m³	Temperature: 0 - 50°C Humidity: 20 - 95%
Minimum Display	Temperature: 0.10°C Humidity: 1% Heat Stroke Index: 0.1°C Dryness Index: 0.1g/m³	Temperature: 0.1°C Humidity: 1%
Measurement Interval	20 seconds	
Alarm Volume*1	Mute Small: 60 dB Large: 70 dB	
Warning Level*2	Heat Stroke: 4 levels Influenza: 3 levels	
Power Source	1x lithium battery CR2032 (Batteries included are for trial use only and may not last as long)	
Dust/Waterproof*3	IP54	
Material	Body: ABS resin, acrylic resin Cover: Silicon resin	Body: ABS resin, acrylic resin
Accessories	Band	

- *1 Volume at a distance of 10 cm.
- *2 The warning levels are based on the standard in Japan.
- *3 Dustproof performance: Prevents dust from penetrating inside the device. A small amount of dust that has penetrated inside will not hinder normal operation. Waterproof performance: Protected from water spray from any direction.