


## Fiberglass Folding Rule



Item Code	Description	Body Size (mm)	Weight (g)	JAN Code	Packing Unit	Packaging
78625	5-folding 1 m Black	1,000×15×3.2	67	4 960910 786257	5	
78605	5-folding 1 m Yellow	1,000×15×3.2	67	4 960910 786059	5	
78606	10-folding 1 m White	1,000×13×2.2	44	4 960910 786066	20	
78833	10-folding 2 m Yellow and White	2,000×15×3.2	131	4 960910 788336	10	
78633	5-folding 1 m Black without Package	1,000×15×3.2	67	4 960910 786332	5	
78705	5-folding 1 m Yellow without Package	1,000×15×3.2	67	4 960910 787056	5	
78708	10-folding 1 m White without Package	1,000×13×2.2	44	4 960910 787087	20	
78841	10-folding 2 m Yellow and White without Package	2,000×15×3.2	131	4 960910 788411	10	
78623	5-folding 1 m/shaku Yellow	1,000×15×3.2	67	4 960910 786233	5	
78624	5-folding 1 m/shaku Yellow without Package	1,000×15×3.2	67	4 960910 786240	20	

### Features

- Highly durable, as moving parts can withstand folding 25,000 times with little wear and no reduction in performance
- Glass fiber has been combined into nylon resin to provide high rigidity and superior straightness

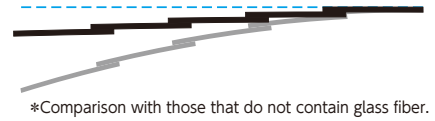

- Joints are wire-reinforced to stay securely fastened and be resistant to breaking or bending




- Nylon resin construction makes it resistant to rust



- Easy-to-read, large numbers
- Does not conduct electricity well, and will not conduct electricity up to about 11,000 V



- Click stops at 90 and 180 degrees

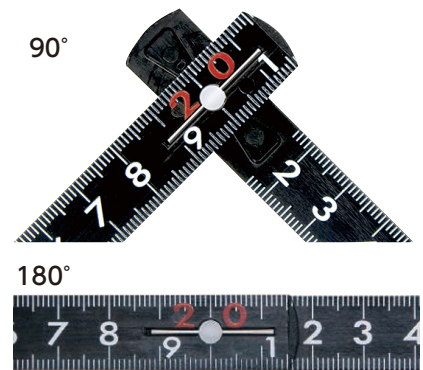

- Folds up for portability

### Use

- For measuring length, drawing lines and boning rod measurement
- For reinforcement work

### Specifications

Length	0 - 1,000 mm: ±1.0 mm
Tolerance	1,001 - 2,000 mm: ±1.4 mm
Material	Nylon resin with fiberglass