



Fiberglass Dial Caliper



19932



Item Code	Description	Body Size (mm)	Weight (g)	JAN Code	Packing Unit	Packaging
19932	150 mm	224×77×15	44	4 960910 199323	5	

Features

- Easy-to-read scale
- Will not scratch other surfaces
- Adjust to 0 by turning the dial

Use

- For measuring outside, inside, depth, and gap
- For hobby and DIY work

Specifications

Body Size	a	224 mm
	b	77 mm
	c	14 mm
	d	39 mm
	e	38 mm
	f	16 mm
	g	3.8 mm
Measuring Range	0.1 - 150 mm	
Minimum Reading	0.1 mm	
Depth Probe	Attached	
Accuracy	Outside Measure: ±0.1 mm	
Material	Main Part: Nylon resin (with fiberglass)	

Digital Caliper


Includes storage case




19994



19995

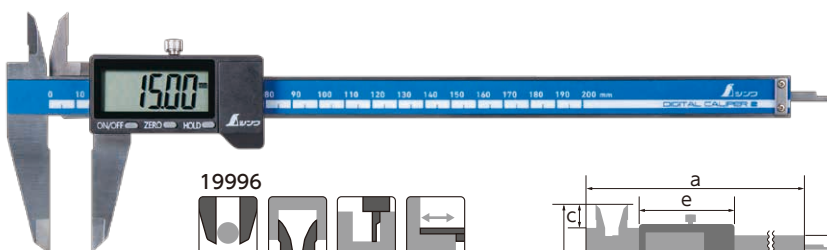

19996



● Parts are listed from p.274

Item Code	Description	Body Size (mm)	Weight (g)	JAN Code	Packing Unit	Packaging
19994	Mini 2 100 mm	167×60×15	90	4 960910 199941	3	
19995	Large Display 2 150 mm	235×77×15.5	155	4 960910 199958		
19996	Large Display 2 200 mm	294×90×15.5	175	4 960910 199965		
19997	Large Display 2 300 mm	400×102×15.5	270	4 960910 199972		

Features

- Large LCD screen with easy-to-read characters

Character height 9 mm

Character height 13 mm



19994



19995/19996/19997

- Auto power off function
- Ideal for precision work with a minimum reading value of 0.01 mm



- Zero set function enables relative measurement
- Hold function to retain the measured value
- Convenient case for storage and transport
- Digital unit has drip-proof design

Use

- For measuring outside, inside, depth, and gap
- For relative measurement and indirect measurement
- For measurement and inspection of industrial products

Specifications

Item Code	19994	19995	19996	19997
Body Size	a 167 mm	a 235 mm	a 294 mm	a 400 mm
	b 60 mm	b 77 mm	b 90 mm	b 102 mm
	c 12 mm	c 15 mm	c 19 mm	c 19 mm
	d 30 mm	d 40 mm	d 50 mm	d 60 mm
	e 53 mm	e 64 mm	e 64 mm	e 64 mm
	f 13 mm	f 16 mm	f 16 mm	f 17 mm
	g 3.6 mm	g 3.6 mm	g 3.6 mm	g 3.6 mm
	Measuring Range	0.01 - 100 mm	0.01 - 150 mm	0.01 - 200 mm
Minimum Reading	0.01 mm			
Depth Probe	Attached			
Accuracy*	Outside Measure: ±0.03 mm			Outside Measure: ±0.04 mm
Use Temperature	0 - 40°C			
Storage Temperature	-10 - 60°C			
Storage Humidity	Below 80%			
Auto power off	Power automatically turns off 5 minutes after turning on			
Battery	1 x Silver oxide battery SR44 (Battery included is for trial use only and may not last as long)			
Material	Body: Stainless steel		Digital Module: ABS resin	

*Includes quantization error (±1 count).

● Calibration certificate (JCSS) on p.289